

Economic and Environmental Evaluation of Different Irrigation Systems for Date Palm Farming System in the GCC Countries: Case of Oman

Boubaker Dhehibi – Correspondin author

Sustainable Intensification and Resilient Production Systems Program (SIRPSP)
International Center for Agricultural Research in the Dry Areas (ICARDA)
El-Rawaby Neighborhood- Behind Abdallah Abu Ghosheh street
Yousef el sukkar street bldg. no 8- Amman-Jordan
Phone: (+962) 06- 5920120; Fax: (+962) 06- 5920350
E-mail: b.dhehibi@cgiar.org

Mohamed Ben Salah

International Center for Agricultural Research in the Dry Areas (ICARDA)
Directorate General of Agriculture & Livestock Research
Rumais, Barka, Muscat, Oman
Phone: (+968) 26893578/26893571; Fax: (+968) 26893572
E-mail: m.ben-salah@cgiar.org

Aymen Frija

Sustainable Intensification and Resilient Production Systems Program (SIRPSP)
International Center for Agricultural Research in the Dry Areas (ICARDA)
3, Rue Mahmoud Ghaznaoui, Menzah IV, 1082, Tunis, Tunisia
Phone: (+216) 71752099/752134; Fax: (+216) 71753170
E-mail: a.frija@cgiar.org

Aden Aw-Hassan

Sustainable Intensification and Resilient Production Systems Program (SIRPSP)
International Center for Agricultural Research in the Dry Areas (ICARDA)
El-Rawaby Neighborhood- Behind Abdallah Abu Ghosheh street
Yousef el sukkar street bldg. no 8- Amman-Jordan
Phone: (+962) 06- 5920120; Fax: (+962) 06- 5920350
E-mail: a.aw-hassan@cgiar.org

Hamdane El Ouhibi and Youssef M. Al Raisi,

Date Palm Research Center
Directorate General of Agriculture & Livestock Research
Rumais, Barka, Muscat, Oman

Paper prepared to be presented as visual presentation at the International Conference on Water,
Environment, Energy and Society ICWEES2018
Djerba Island, Tunisia; 19 - 21 March, 2018
(<http://icwees2018.tn/>)

Economic and Environmental Evaluation of Different Irrigation Systems for Date Palm Production in the GCC Countries: Case of Oman

Summary - In the frame of the ICARDA project “*Development of sustainable date palm production systems in the GCC countries of the Arabian Peninsula*”, researchers succeeded to introduce one promising technology (subsurface drip irrigation - SDI) in the date palm farming system in the Gulf region, defined as the poorest in the word in terms of water resources. The objective to introduce this new technologies is to provide water application strategies that maximize yield and minimize water loss for a range of irrigation system designs and applied for date palm farmers in the GCC countries.

In the light of these challenges, the main objective of this study is to evaluate the effect of the irrigation water volumes on the date palm productivity and water use efficiency under several conventional and improved irrigations systems.

The examination of the performance of bubbler irrigation (BI) and SDI systems were conducted at Al Kamil and Al Wafi Agricultural Research Station – South Sharqiya, Sultanate of Oman. The performance of both systems was evaluated in terms of water use efficiency (WUE), economic performance, and yield of date palms (variety *Khalas*). Three intervention levels on SDI have been used: at the rate of 60%, 40% and 20% of water requirement. Results of this experimental study showed that SDI under the three intervention/options uses water more efficient in comparison to BI. Indeed, a considerable quantity of water for about 3545.554, 5726.45, and 7565.473 m³/ha could be saved by using SDI at the rate of 20%, 40 and 60% of water requirements, respectively. Thus, the WUE indicator is for about 2.0, 2.7, and 4.7 kg/m³, respectively. These figures are much higher when are compared to BI system where WUE is around 1.3 kgm⁻³.

The economic evaluation and comparison between both systems suggest a considerable effect of the used irrigation method on the water cost, total return and net profit. Indeed, under BI system, the total return, total variable costs, water costs and net profit were 20211.36, 5857.81, 1224.29, and 13129.25 \$ ha⁻¹, respectively. From another hand, by using SDI at the rate of 60% of water requirements, we note a slight difference in net profit when using this irrigation system, which is about US\$12825.02/ha. Economic findings suggest that using SDI method versus BI method have additional cost but is economical at the long term as the SDI found to sustain the date palm farming system in this region where arid conditions acts as natural constraints for expansive agriculture. Therefore, this sustainability of SDI in comparison to the BI could be reached if SDI system is well designed, maintained and used properly.

Finally, findings suggest that SDI for date palms is an effective and practical method for irrigating date palms where, a noticeable volume of water could be saved due to the elimination of evaporation water compared to other irrigation systems including the BI. In addition, under the arid and semiarid climates conditions, where rainfall is minimal and the air temperature is high, this will result in high increase in evaporation rate from soil surface that result in salt accumulation in the top layer of the soil where active roots concentrates which in turn lead to yield reduction, the use of SDI system could eliminate the weed growth around the tree and prevent salt accumulation on the soil surface.

Key words: surface drip irrigation, economic valuation, environmental valuation, date palm, Oman.

1. Introduction

The present study is conducted within the framework of the “Development of Sustainable Date Palm Production Systems in Gulf Cooperation Council Countries” project funded by the Gulf Cooperation Council Secretariat (GCC). This research and development project aims to produce new knowledge and practices to improve date palm production systems in the Gulf region. The main activities of the project include improving the productivity of cultivars, managing natural resources (land and water) for optimal performance, optimizing the use of different inputs in the cropping process (fertilizers, pollinators, wastewater, etc.), and studying the genetic diversity of date palms. The transfer of technology and experience between partners is an integral part of the project.

One promising technology introduced through the project is the subsurface drip irrigation. This technology has the advantage to potentially water saving, yield increases. It has the potential to be the most efficient irrigation method available today and is considered to be one of the most attractive and promising technologies for the Arab States of the Gulf countries, a region defined as the poorest in the world in terms of water resources where arid conditions in these countries act as a natural constraint for expansive agriculture.

The objective to introduce this technology was to provide water application strategies that maximize yield and minimize water loss for a range of irrigation system designs and applied for date palm farmers in the GCC countries. Therefore, while developing improved technologies is important for farmers in the rural livelihoods for this region, new technologies can only affect livelihoods positively if they are profitable and by then adopted by farmers.

In the light of these challenges, the main objective of this study is to evaluate the effect of the irrigation water volumes on the date palm productivity and water use efficiency under several conventional and improved irrigations systems (surface, subsurface, bubbler, subsurface drip irrigation). It is mainly to investigate economically and environmentally the effectiveness of this introduced irrigation system in term of water use and requirement and yield productivity. This is mainly to compare this irrigation system (SDI) to several conventional irrigation systems used in the GCC countries in terms of water use efficiency and date palm yield productivity. The study is focusing on Oman, Saudi Arabia and Qatar.

2. Date palm irrigation systems in Oman

According to Al Yahai and Khan (2015), irrigation water is traditionally delivered to date palm groves through open canals. Water sources are mainly underground aquifers in addition to wells or via the *Falaj*, - an ancient system of delivering water to farms in Oman. Other sources of water have also been explored, such as the utilization of treated wastewater (El Mardi *et al.*, 1995, 1998), which is only used to little extend. The timing and frequency of irrigation is largely dependent on the allocated shares of water for each grove and is not based on empirical methods. Adoption of new methods of irrigation (such as bubbler irrigation, which is a localized, low pressure, solid permanent installation drip irrigation system), particularly in well-irrigated groves, is slowly gaining momentum as the installation is being subsidized by the government. Al-Yahyai and Al-Kharusi (2012b) reported also that chemical quality attributes of date palm (cv. *Khalas*) grown in northern Oman varied in response to decreased frequency of irrigation water applied during fruit development.

Nowadays, about 75% of date palm trees in the Sultanate is irrigated by the flood irrigation system that uses an abundant quantity of water. The remaining 25% is irrigated by bubbler irrigation systems. Moreover, the quantity of water required at the farm level is determined by the farmer's experience. The application of traditional irrigation system (flood irrigation) is putting a pressure on the existing water resources and, consequently led to the waste of large volumes of this valuable resource. Indeed, the adoption of modern irrigation techniques such as drip and subsurface drip irrigation is more than needed today for this very arid regions. This is mainly to increase water use efficiency and productivity of the grown date palms.

Several previous studies indicated that subsurface drip irrigation is one of the promising technologies that contributes to improve water use efficiency and productivity. In addition, it is considered as the most effective way to provide water and nutrient directly to the plant and to increase crops productivity (Tiwaki *et al.*, 1998; Thomson *et al.*, 2002, 2003). This subsurface drip irrigation represents the recent improvement of irrigation as it significantly reduces losses of direct evapotranspiration, runoff, and deep percolation (Hanson and May, 2007; Safi *et al.*, 2007). It is within this framework that the project “*Development of sustainable date palm production systems in the GCC countries of the Arabian Peninsula*”, funded by the GCC, implemented, in partnership, by ministries of agriculture, agricultural authorities, and agricultural research institutions and universities in the six GCC countries of the Arabian Peninsula (Kingdom of Bahrain, United Arab Emirates, State of Kuwait, State of Qatar, Sultanate of Oman, and Kingdom of Saudi Arabia) and the International Center for Agricultural Research in the Dry Areas (ICARDA). The major objectives of the project are to increase propagation efficiency and expedite production of offshoots in the quantities needed by growers at a reduced cost; improve date palm productivity per unit of water on supporting the widespread of this subsurface drip irrigation technology, and rationalize the use of the available resources so that production becomes sustainable.

Many studies suggest the use of subsurface drip irrigation as a water saving technology in arid areas, but it is necessary to study and examine the performance and the efficiency of this irrigation technology in comparison with other irrigation systems such as bubbler irrigation systems which is also being used in these areas. The main objective of this study is to examine the efficiency of subsurface drip irrigation system for young palm trees in the Sultanate of Oman in terms of both water use efficiency, yield and economic viability of this system in comparison to the existing bubbler irrigation system. Our results will help to identify the most efficient technique for water conservation (environmentally and economically) as well as the most profitable.

3. Material and methods

3.1. Purpose of the experimental research study in Oman

The main objective of this study is to evaluate the effect of the irrigation water volumes on the date palm productivity and water use efficiency under the subsurface drip irrigation system. It is mainly to investigate economically and environmentally the effectiveness of this irrigation system in term of water use and requirement and yield productivity. This is mainly to compare the bubbler irrigation system (BI) and the subsurface irrigation system (SDI) in terms of water use efficiency and date palm yield productivity (*Khalas variety*). The experiment was conducted in the Research Agricultural Station in Al Kamil and Al Wafi at the Sharqiyah Governorate – Sultanate of Oman.

3.2. Location and site characteristics

Site localization: The experiment was conducted at the experimental station at the Research Agricultural Station, Al Kamil and Al Wafi, Sharqiyah Governorate, Sultanate of Oman (22° 14' 13.00 N, 59° 11' 04.00 E).

Site characteristics: The soil profile of the experimental site in the upper 0–30 cm soil was sandy loam texture composed of 72 % sand, 11.11% silt and 16.23% clay. The average values of PH and EC were 7.6 and 1.12 Ds m⁻¹, respectively

Table 1. Physical and chemical properties of the field at different soil layers

Soil Depth (cm)	Particle size distribution (%)					PH	Ca Meq/l	Mg Meq/l	CaCo3 %	ECe (dS m ⁻¹)
	Gravel (%)	C.Sand (%)	F.Sand (%)	Silt (%)	Clay (%)					
0-30	0.7	1.83	70.03	11.11	16.23	7.6	3.63	4.06	34.06	1.12

30-60	-	-	-	-	-	7.9	4.33	4.9	-	1.27
60-90	-	-	-	-	-	7.9	3.66	3.96	-	1.06

Source: Omani Date Palm Project Team (2016).

3.3. Climate conditions at the experimental site

The research field is situated in arid climatic region. The averages of air temperature, relative humidity, wind speed, sunshine duration and total precipitation were monitored by an in-situ meteorological station. The air water vapor pressure deficit was calculated using daily and hourly average temperatures and relative humidity. Finally, the reference evapotranspiration (ET_0 , mm day⁻¹) was calculated according to the Penman-Montieth equation (Allen *et al.*, 1998). Temperature is varying between 20.9 (minimum) and 34.8 C (maximum). Humidity is about 59% and the wind speed is around 1.7 ms⁻¹. Average estimated ET_0 is estimated to be 5.42 mm/day (Figure 1).

Figure 1. The average monthly values of climatic conditions in the experimental site



Source: Owen elaboration from experimental data (2017).

3.4. Irrigation systems description and experimental interventions

The study consists on the evaluation of four interventions as follows:

- **INTERVENTION I:** Irrigation with bubbler irrigation system at the rate of 100% of water requirements.
- **INTERVENTION II:** Irrigation with subsurface drip irrigation at the rate of 60% of water requirements.
- **INTERVENTION III:** Irrigation with subsurface drip irrigation at the rate of 40% of water requirements.
- **INTERVENTION IV:** Irrigation with subsurface drip irrigation at the rate of 20% of water requirements.

Water requirement was calculated based on the evapotranspiration coefficient and using the CROPWAT software. The Kc coefficient used in the analysis has an average value of 0.9 for the date palm crop.

3.5. Irrigation scheduling and experimental test

The monthly water irrigation schedule is presented in the table below (Table 2). Measurements covered the year 2015-2016.


Table 2. Irrigation schedule and water applied to date palm variety Khalas in Al Kamil and Al Wafi experimental station at the Sharqyah Governorate – Sultanate of Oman.

Month	ET _o Weather station in AL Kamil (mm)	Kc FAO	Crop water requirement (mm/day)	Irrigated Area (m ²)	Water applied (mm/month)	Total water applied/month (m ³ /month)
January	2.82	0.9	2.5	38	79	3.0
February	3.97	0.9	3.6	38	100	3.8
March	4.36	0.9	3.9	38	122	4.6
April	5.45	0.9	4.9	38	147	5.6
May	6.99	0.9	6.3	38	195	7.4
June	7.64	0.9	6.9	38	206	7.8
July	7.23	0.9	6.5	38	202	7.7
August	6.93	0.9	6.2	38	193	7.3
September	6.48	0.9	5.8	38	175	6.6
October	5.76	0.9	5.2	38	161	6.1
November	4.13	0.9	3.7	38	112	4.2
December	3.32	0.9	3.0	38	93	3.5
Total					1783.7	67.8

Source: Owen elaboration from experimental data –Date palm project team in Oman (2017).


The different measures and parameters used in the experience such as evapotranspiration, crop water requirement, water applied and total water applied are detailed in the figures below. Figures bellows (Figures 2-5) indicate that high values are noted during the summer season (May-August).

Figure 2. ET₀ (mm) at the weather station in Al Kamil

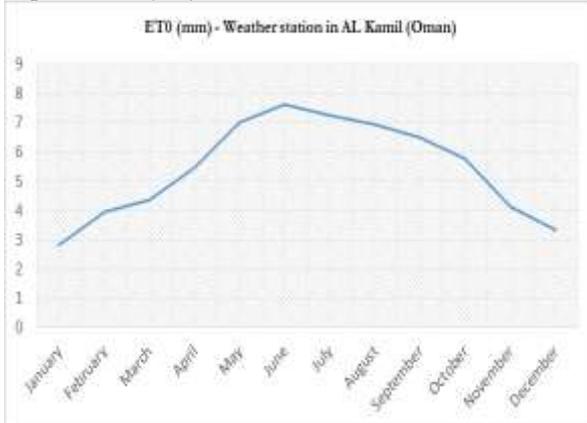


Source: Owen elaboration from experimental data –Date palm project team in Oman (2017).

Figure 3. Crop water requirement (mm/day).

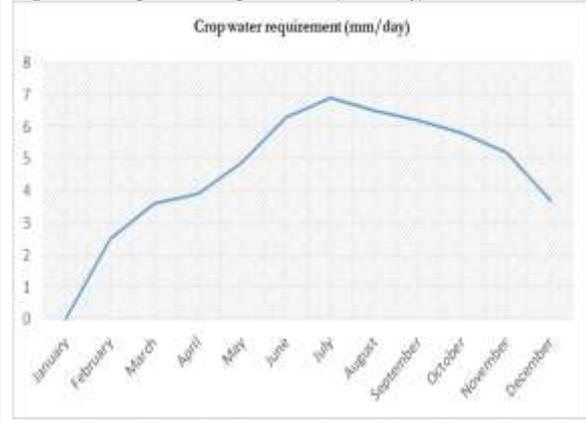


Source: Owen elaboration from experimental data –Date palm project team in Oman (2017).

Figure 4. Water applied (mm/month).

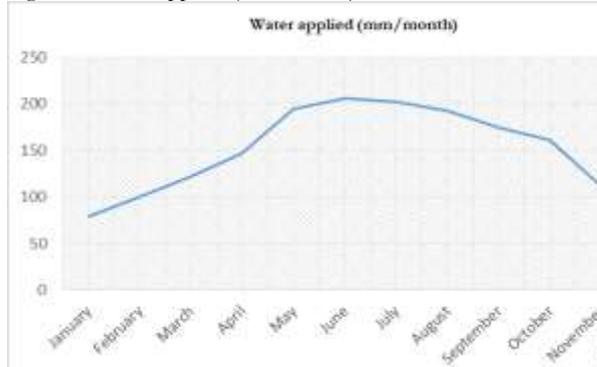

Source: Owen elaboration from experimental data –Date palm project team in Oman (2017).

Figure 5. Total water applied/month (m³).

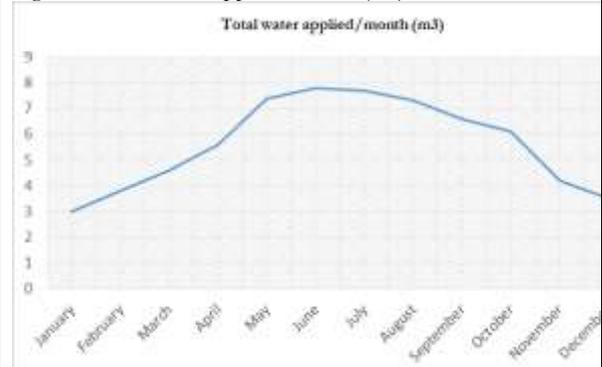

Source: Owen elaboration from experimental data –Date palm project team in Oman (2017).

3.6. Experimental irrigation systems description and characteristics

After several decades of research and development, the subsurface drip irrigation system becomes one of the systems characterized by high efficiency and productivity (Al Amoud, 2010). Through extensive research, most of the subsurface drip irrigation system problems were solved including; clogging of emitters by small roots, lateral installation, and fertigation. Findings of many research experiments have indicated a significant increase in efficiency of water and nitrogen use that lead to a high increase in yield, and, consequently improving the quality of date palm product. The system has also contributed in limiting ground water pollution with nitrate and salts in the long run. As the system work under the soil surface, it was noticed that it has an advantage over the traditional surface drip system in saving water and nutrients, in addition to the control of salinity, deep percolation and durability of the system. This may be due to the spherical soil water wetting as compared to the half spherical in the case of surface drip system (Phene, 1995).

Nowadays, different irrigation techniques are available to irrigate crops, including flood irrigation, furrow irrigation, micro irrigation, drip irrigation, and subsurface drip irrigation. However, but not all of them are suitable for date palm irrigation. The previous methods are of importance and each has its own advantages and disadvantages. In the following section, we present the advantages and limitations of the two irrigation methods considered for evaluation in the current study: Bubbler and subsurface drip irrigation.

Bubbler Irrigation System: Bubbler irrigation is a localized, low pressure, solid permanent installation system used in tree groves. Each tree has a round or square basin which is flooded with water during irrigation. The water infiltrates into the soil and wets the root zone. The water is applied through bubblers. These are small emitters placed in the basins which discharge water at flow rates of 100–250 litres/h. Each

basin can have one or two bubblers as required. With bubbler irrigation the percentage of the root soil volume wetted is about 80 percent. Thus, there are no restrictions on the way the irrigation programme is prepared. This can be either fixed depletion or fixed interval, taking into consideration the soil water holding capacity, the availability of the irrigation water, the size of flow, etc. The advantages of this irrigation systems are as follows: (i) high irrigation application efficiency, up to 75 percent, resulting in considerable water savings, with absolute control of the irrigation water from the source to the tree basin; (ii) all the piping network is buried, so there are no field operations problems; (iii) the technology is simple and no highly sophisticated equipment is used; and finally (iv) the system can be operated by unskilled farmers and laborers. No filters or fertilizer injectors are needed. Therefore, this system presents some limitations such as: (i) high initial purchase cost; (ii) small water flows cannot be used as in other micro-irrigation systems; and (iii) in sandy soils with high infiltration rates, it is difficult to achieve a uniform water distribution over the tree basins.

Subsurface Drip Irrigation System: This technique is defined as an application of water under the soil surface through drippers, which deliver water at rates generally similar to surface drip irrigation. As subsurface drip irrigation is a recently introduced in some Gulf countries, a better understanding of its performance in comparison with bubbler irrigation system (as the case in Oman), in local conditions, and its impact on water use and yield of date palm is necessarily required. Several research studies argued that SDI represents the recent improvement of irrigation and has the advantage to prevents, or in most cases, significantly reduces losses of direct evaporation, runoff and deep percolation. The precise application of water and fertilizers resulted in the increased water use efficiency, application uniformity of water and consequently the improvement in crop yield. Limitations of this technology are mainly resulted on its installation cost; requires very clean water; and sometimes difficult to determine if the correct amount of water has been applied by the system, and when it becomes clear that it is too little, it may be too late.


The main objective of this study is to examine the efficiency of subsurface drip irrigation system for *Khalas* palm trees in arid conditions, the experimental and demonstrative field is located in Al Kamil and Al Wafi Agricultural Research Station at South Sharqeyah Governorate (Figure 6 & 7). The station is composed (among other) of a fully equipped weather station to measure rainfall, temperature, wind speed, wind direction, humidity and solar radiation. Our results will help to identify the most efficient technique for water conservation among BI and SDI, particularly for *Khalas* date palm variety in this arid farming systems.

Factors influencing water requirements

For the purpose of selecting the best field experiments, it is necessary to take certain aspects into consideration, particularly for the calculation of the volume of water required by a palm. The following aspects, playing a major role on influencing evapotranspiration, and consequently in this calculation, have been considered:

- Soil salinity: If the soil is saline, more water must be given to enable a leaching process for clearing the salt from the soil.
- Temperature: The higher the temperature, the higher the rate of evaporation and the more water the plant needs.
- Humidity: The lower the humidity level, the more water needed.
- Wind (speed and occurrence): Higher constant wind speeds causes higher evaporation and thus higher water demands.

Figure 6. Installation of the subsurface drip irrigation system (Radius 120 cm and Depth 50 cm)

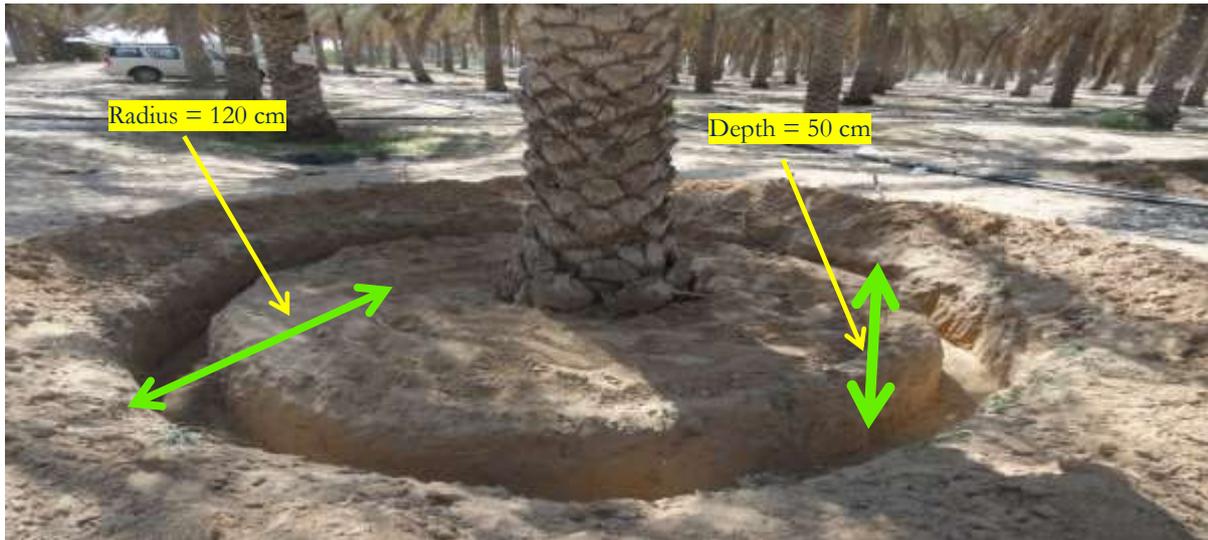

Source: Owen elaboration from experimental data –Date palm project team in Oman (2017).

Figure 7. Subsurface drip irrigation system



Source: Owen elaboration from experimental data –Date palm project team in Oman (2017).

3.7. Data collection and methodological framework

Data collection

As mentioned before, data on water applied, required, temperature, evapotranspiration has been collected from the experimental study conducted at Al Kamil and Al Wafi Agricultural Research Station at South Sharqeyah Governorate, Oman. The socio economics data used was collected from several national and international sources.

Water use efficiency (WUE)

Water use efficiency – WUE was calculated as a ratio between the marketable yield and the seasonal values of actual evapotranspiration using the following equation (Howell, 2001):

$$WUE = Y/W \quad (1.a)$$

Where WUE is water use efficiency (kg/m^3), Y is total marketable date palm yield (kg) and w is seasonal irrigation applied water (m^3).

Economic analysis

Partial budgeting method is used for economic comparison between both irrigation systems (BI vs SDI).

Statistical analysis

Data collected was examined statistically by using the ANOVA procedure from the statistical analysis software (SPSS). To compare treatment means, Fisher’s protected least significant difference (LSD) was used for ($p \leq 0.05$) significant level.

4. Results and discussion

4.1. Economic evaluation: Date palm yield (DPY)

The effect of the irrigation interventions on the date palm productivity is presented in the table and figures below (Table 3 & Figures 8, 9). The empirical figures displayed in the table below indicate that no significant difference on the date palm productivity under the intervention I, irrigation with bubbler irrigation system at the rate of 100% of water requirements and the intervention II (irrigation with subsurface drip irrigation at the rate of 60 % of water requirements).

Table 3. Date palm productivity under the four irrigation interventions level (Kg/tree and Kg/ha)


Irrigation intervention type	Yield - Experimental Irrigated Area (Kg/tree)	Yield – Potential Irrigated Area (Kg/ha)
INTER I: Irrigation with bubbler irrigation system (BI) at the rate of 100% of water requirements	79.0	12956
INTER II: Irrigation with subsurface drip irrigation (SDI) at the rate of 60% of water requirements	78.3	12841.2
INTER III: Irrigation with subsurface drip irrigation (SDI) at the rate of 40% of water requirements	69.8	11447.2
INTER IV: Irrigation with subsurface drip irrigation (SDI) at the rate of 20% of water requirements	68.8	11283.2

Source: Owen elaboration from experimental data –Date palm project team in Oman (2017).

Note: Number of date palm trees/ha (10000 m²) = 164.

The productivity level under the first irrigation system is about 79 kg/tree, while it was around 78.3 kg/tree under the second system. However, under the third (irrigation with subsurface drip irrigation at the rate of 40% of water requirements) and fourth intervention (irrigation with subsurface drip irrigation at the rate of 20% of water requirements), the productivity of the date palm – variety *Khalas* decreased to reach an average of 69.8kg/tree and 68.8kg/tree, respectively (Figure 8 & Figure 9).

Figure 8. Date palm productivity under the four irrigation interventions level (Kg/tree)

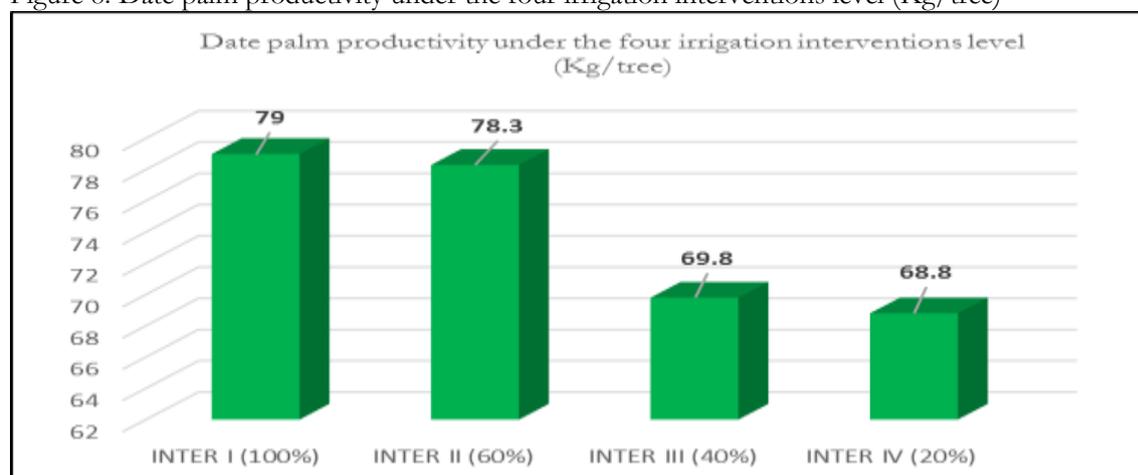


Source: Owen elaboration from experimental data –Date palm project team in Oman (2017).

Statistical analysis showed that no significant difference of productivity was recorded between the first and second interventions. The same result was also found for the third and fourth interventions at the 0.05 statistical level. In general, the difference on productivity between Inter I, Inter II, Inter III, and Inter IV is, on average, for about 0.7 kg/tree, 9.2kg/tree, and 10.2kg/tree, respectively. This difference is about 114.8, 1508.8, and 1672.8 kg per hectare, respectively.

At the current market price (0.8 OMR/kg the *Khalas* variety), we note a difference of about US\$238.78, US\$3138.30, and US\$3479.42 at the hectare, between the BI and the three SDI interventions, respectively. However, if we want to evaluate the real return and the net profit, we must consider the cost of water for each intervention in addition to the running costs in each case.

Figure 9. Date palm productivity under the four irrigation interventions level (Kg/ha)

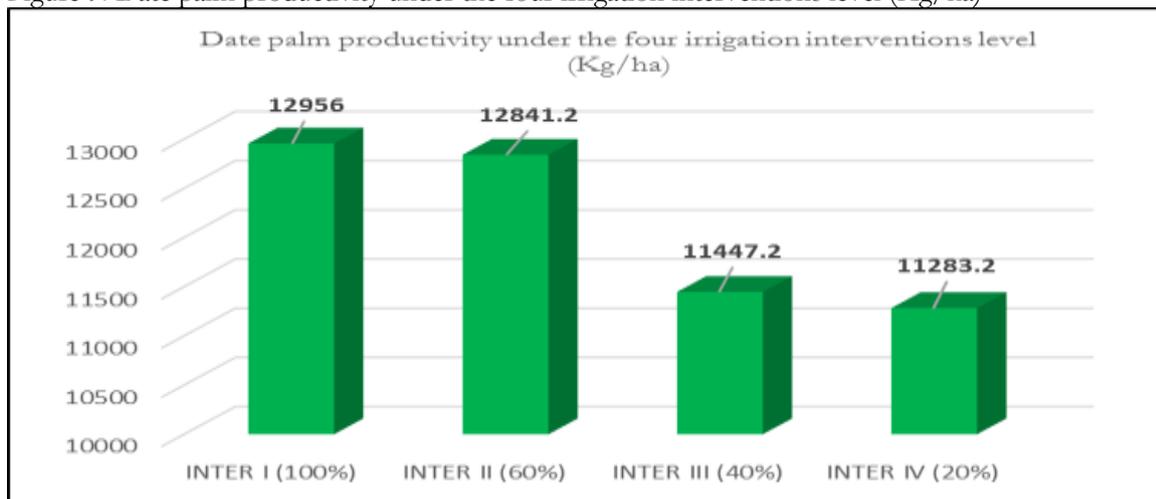


Source: Owen elaboration from experimental data –Date palm project team in Oman (2017).

4.2. Environmental evaluation: Water Use Efficiency (WUE)

This section presents an assessment if the water use efficiency of both SDI and BI irrigation methods. Empirical findings are presented in the following figures (Figure 10).

Figure 10. Water productivity under the four SDI irrigation interventions (Kg/m³)

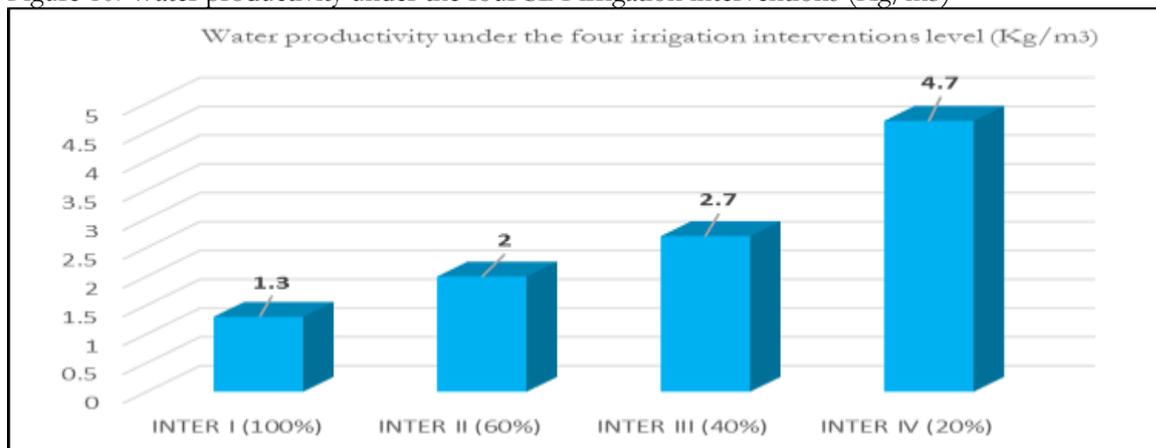

Source: Owen elaboration from experimental data –Date palm project team in Oman (2017).

Results shows that water productivity (kg/m³) increase with the decrease of water quantity. Findings indicated that the fourth intervention (irrigation with subsurface drip irrigation at the rate of 20% of water requirements) is the most efficient. Data shown in figures9-10 demonstrates that WUE was significantly increased by 35, 52, and 72 % in case of subsurface drip irrigation (SDI) under the three intervention levels (60% with WUE= 2 kg m⁻³, 40% with WUE= 2.7 kg m⁻³, and 20% with WUE= 4.7 kg m⁻³) compared to

bubbler irrigation (BI with WUE= 1.3 kg m⁻³). These findings confirmed that SDI contribute to save 35 and 72% (depending on the implemented intervention) of irrigation water without decreasing the *Khalas* date palm productivity level.

These results suggest that, from the environmental point of view, a significant reduction in the volume of water can be achieved when using SDI system. This amount of water saved by hectare under the three SDI options 60%, 40%, and 20% is estimated to be 3545.554, 5726.45, and 7565.473 m³, respectively. At an estimated average price of US\$0.041 per m³ of irrigation water, the average dollar value saved by hectare under the three options will be around US\$ 145.36; US\$ 234.78; and US\$ 310.18, respectively.

Table 4. Quantity of water consumed and saved under the four irrigation interventions level (m³/ha and US\$/ha) – SI vs SDI

Irrigation intervention	Water Use Efficiency (kg/m ³)	Total Water Consumed (m ³ /ha)	Total Water Saved (m ³ /ha) BI vs SDI	Potential Water Saving (US\$/ha) BI vs SDI Scenario I	Potential Water Saving (US\$/ha) BI vs SDI Scenario II	Potential Water Saving (US\$/ha) BI vs SDI Scenario III	Potential Water Saving (US\$/ha) BI vs SDI Scenario IV
INTER I	1.3	9966.154	-	-	-	-	-
INTER II	2.0	6420.6	3545.554	74.456634	109.912174	145.367714	180.823254
INTER III	2.7	4239.704	5726.45	120.25545	177.51995	234.78445	292.04895
INTER IV	4.7	2400.681	7565.473	158.874933	234.529663	310.184393	385.839123

Source: Owen elaboration from experimental data –Date palm project team in Oman (2017).

Note:

- Number of date palm trees/*feddan* (4200 m²) = 64.
- Number of date palm trees/ha (10000 m²) = 164.
- Water pricing scenarios: The combined capital, maintenance and energy cost of pumping groundwater from a typical dug well for traditional irrigation is estimated at about US\$0.021/m³ (Scenario I) and US\$0.031/m³ (Scenario II) for average conditions). Pumping costs from a tube well for a modern irrigation system, requiring a larger pumping head, are between US\$0.041 (Scenario III) and 0.051/m³ (Scenario IV).

The results presented in the table above (Table 4) indicated that there is a potential cost saving by using subsurface drip irrigation (under the tree intervention types) in comparison to bubbler irrigation system (BI). This saving is ranging from 74.45\$/ha to 385.8 \$/ha according to the SDI irrigation intervention category used. This result suggests that a considerable amount of water (in terms of quantity and value) could be potentially saved by using SDI, and consequently a more sustainable farming system for *Khalas* date palm variety in the research site, in particular and, in the Sultanate of Oman, in general.

4.3. Economic analysis (EA)

Total annual date palm water use will certainly have a significant impact on the water costs. Thus, the irrigation method will clearly affect the total return and the net profit. In addition, we should indicate that initial cost (equipment and installation) for SDI system is higher than the BI system.

Hypotheses used in this economic analysis are as follows:

- The expected life of the bubble irrigation system (BI) is 10 years.
- The expected life of the subsurface drip irrigation system (SDI) is 10 years
- The economic analysis was conducted taking into consideration the depreciation of the installed irrigation system in both cases. Results are at the hectare level and per year.
- The price of one m³ of irrigated water used in the analysis is US\$0.041.
- One Omani Rial (OMR) = 2.60 \$ (average January-March 2017).
- The average cost of installing bubbler irrigation system (equipment and installation) at the hectare is estimated at 1963 OMR (which is equivalent to US\$5098.04) ha. The cost of operation and maintenance is estimated at 6% of the equipment and installation cost per ha and year: US\$305.88.

- The quantity of water used for one ha of *Khalas* date palm trees using bubbler irrigation system is estimated at 9966.154 m³. The cost of this water used is around US\$408.61.
- The average cost of installing subsurface drip irrigation (equipment and installation) is estimated at 2614 OR (equivalent to US\$ 6788.73). The cost of operation and maintenance is estimated at 6% of the equipment and installation cost per ha and year: US\$ 407.32.
- The quantity of water used for one ha of *Khalas* date palm trees using subsurface drip irrigation system at the level of 60, 40, and 20% of water requirement is estimated at 6420.6, 4239.704, and 2400.68 m³, respectively. The cost of the used amount of water is US\$145.36, US\$234.78, and US\$310.18, respectively.

The empirical findings are presented in Table 5. Results displayed in this table shows the effect of irrigation method on water cost, total return and net profit considered in average values at the hectare level. The results indicated that, under bubbler (BI) irrigation system, the total return, total variable costs, water costs and net profit were 20211.36, 5857.81, 1224.29, and 13129.25 \$ ha⁻¹, respectively. In addition, we noted a slight difference in net profit when using SDI at the rate of 60% of water requirements. This additional benefit will be about US\$12825.02/ha.

Table 5. Effect of irrigation method on total cost, total return and net profit – Variety Khalas

Irrigation intervention	Yield – Potential Irrigated Area (Kg/ha)	Total Return (\$/ha)	Total Variable Costs (\$/ha)	Water Costs (\$/ha)	Net Profit (\$/ha)
INTER I: Irrigation with bubbler (BI) at the rate of 100% of water requirements	12956	20211.36	5857.81	1224.29	13129.25
INTER II: Irrigation with subsurface drip irrigation (SDI) at the rate of 60% of water requirements	12841.2	20032.27	5857.81	1349.43	12825.02
INTER III: Irrigation with subsurface drip irrigation (SDI) at the rate of 40% of water requirements	11447.2	17857.63	5857.81	1260.02	10739.80
INTER IV: Irrigation with subsurface drip irrigation (SDI) at the rate of 20% of water requirements	11283.2	17601.79	5857.81	1184.62	10559.36

Source: Owen elaboration from experimental data –Date palm project team in Oman (2017).

Notes:

- Number of date palm trees/*jedd*an (4200 m²) = 64.
- Number of date palm trees/ha (10000 m²) = 164.
- The market price of the variety *Khalas* is estimated to be 0.8 OMR (2.08 \$).
- The total variable costs were estimated at US\$ 5202.57/ha (Dhehibi *et al.*, 2016).
- In the total return, we consider only 75% of the production is marketable (25% are considered as waste).
- Water costs are calculated using the following estimations: For both irrigation systems (BI and SDI), the irrigation/water cost by hectare includes the equipment cost (depreciation), operating, maintenance cost, and the value of the consumed amount of water.

Furthermore, by using SDI at the rate of 40 and 20%, we note a significant difference in net profit compared to the benefit recorded when using bubbler irrigation method. This difference is ranging between 2389.45 \$ha⁻¹ (SDI at 40% of water requirement) and 2569.89 \$ha⁻¹ (SDI at 20% of water requirement). This analysis showed that total return and net profit values of *Khalas* date palm trees increased with the BI irrigation method in comparison to the SDI (under the three interventions). This fact is due to two major factors: The first one is the amount of water used by BI which impact the yield and consequently the total return. The second factor is the increase in water costs generated mainly by the high upfront investment cost (Both equipment and installation) of SDI in comparison with BI investment cost.

The capital cost associated with installing such a system limits the feasibility of adopting this technology at the short time. Therefore, in the medium and long run periods, the sensitivity of investment and water saving indicate that installation of SDI for date palm trees production system and its use under the three interventions could be profitable investment. Thus, using SDI at the 60% rate of water requirement, if combination equivalent to 12841.2 kg/ha/year, valued at \$ 20032.27/ha/year, coupled with 35% water savings, valued, on average and per year and hectare, at 74.45 \$. In a period of ten (10) years, the total value of net profit is estimated to be US\$3040/ha. Therefore, the water saving will be around 744.5 \$/ha. This result suggest the existence of water economic profitability in the long term by using SDI system in the date palm farming.

5. Concluding remarks and policy implications

The aim of the first section of this report was to examine the performance of bubbler irrigation system (BI) and subsurface drip irrigation systems (SDI) at Al Kamil and Al Wafi Agricultural Research Station – South Sharqiya, Sultanate of Oman. The performance of both systems was evaluated in terms of water use efficiency, economic performance, and yield of date palms (*Cv. Khalas*). Three intervention levels on SDI have been used: subsurface drip irrigation at the rate of 60% of water requirement, SDI at the rate of 40% of water requirement, and SDI at the rate of 20% of water requirement. Results of this experimental study showed that SDI under the three intervention/options uses water more efficient in comparison to the BI system. Indeed, a considerable quantity of water for about 3545.554, 5726.45, and 7565.473 m³/ha could be saved by using SDI at the rate of 20%, 40 and 60% of water requirements, respectively. Thus, the WUE indicator is for about 2.0, 2.7 and 4.7 kg/m³, respectively. These figures are much higher when are compared to BI system where WUE is around 1.3 kgm⁻³.

The economic evaluation and comparison between both systems suggest a considerable effect of the used irrigation method on the water cost, total return and net profit. Indeed, under BI irrigation system, the total return, total variable costs, water costs and net profit were 20211.36, 5857.81, 1224.29, and 13129.25 \$ ha⁻¹, respectively. From another hand, by using SDI at the rate of 60% of water requirements, we note a slight difference in net profit when using this irrigation system, which is about US\$12825.02/ha. Economic findings suggest that using SDI method versus BI method have additional cost but is economical at the long term as the SDI found to sustain the date palm farming system in this region where arid conditions acts as natural constraints for expansive agriculture. Therefore, this sustainability of SDI in comparison to the BI could be reached if SDI system is well designed, maintained and used properly.

Furthermore, based on the results of this experiment, (although measured for only one season), it is possible to conclude that subsurface drip irrigation for date palms is an effective and practical method for irrigating date palms where, a noticeable volume of water could be saved due to the elimination of evaporation water compared to other irrigation systems including the BI system. In addition, under the arid and semiarid climates conditions, as the focused studied region, where rainfall is minimal and the air temperature is high, this will result in high increase in evaporation rate from soil surface that result in salt accumulation in the top layer of the soil where active roots concentrates which in turn lead to yield reduction, the use of SDI system could eliminate the weed growth around the tree and prevent salt accumulation on the soil surface.

Recommendations

Results from the present research study in Oman suggest the following:

- It is understood from the study that investment/capital cost required to install subsurface drip irrigation is relatively high. Therefore, measures can preliminary be taken to reduce the cost of equipment by promoting production and supply of low cost SDI systems.
- The adoption of modern irrigation techniques such as drip and subsurface drip irrigation is more than needed today for this very arid regions. This is mainly to increase water use efficiency and date palm productivity. Therefore, in the short time, the capital cost associated with installing such a system limits the probability of adopting this technology. This suggests that:

- Research on SDI should be given the required attention in order to be able to produce low cost SDI systems.
 - Training programs should be conducted for farmers on the design, maintenance and the proper use of these SDI systems.
 - Extension education programs are to be developed and implemented in order to enhance farmers' adoption rates of modern irrigation methods.
- To accelerate the adoption process of these technologies, it is imperative to create favourable conditions so that a greater number of farmers can take advantage from the benefits of such technologies. A creation of a strong networking among different institutions related to applying this modern irrigation technology and involvement of public and private financial institutions and support services could be an example of mechanisms to enhance adoption.
 - Further studies could be carried out to investigate the barriers of adoption of new irrigation method by farmers and develop solutions to overcome these barriers to conserve limited water resources for obtaining Omani sustainable agriculture goals.

Acknowledgment

We would like to express our sincere gratitude and appreciation to the Gulf Cooperation Council (GCC) Secretariat for funding this research conducted in the framework of the “*Development of sustainable date palm production systems in the GCC countries of the Arabian Peninsula*” project. We are very grateful to the Ministries of Agriculture, Agricultural Authorities, and Agricultural Research Institutions and Universities in the GCC countries of the Arabian Peninsula for their continuous support and great collaboration in the implementation of the project activities.

Declarations of conflict of interest

The authors report no declarations of conflict of interest.

6. References

- Al-Amoud, A. I. 2010. Subsurface drip irrigation for date palm trees to conserve water. In IV International Date Palm Conference 882 2010 Mar 15 (pp. 103-114). Available: http://www.actahort.org/books/882/882_11.htm.
- Al Amoud, A.I., Bacha, M.A., Al-Darby, A.M. 2000. Seasonal water use of date palms in Central Region of Saudi Arabia. *Agricultural Engineering Journal* 9(2), 2000 pp: 51-62.
- Allen, R.G., Pereira, L.S., Raes, D., Smith, M. 1998. Crop evapotranspiration-Guidelines for computing crop water requirements-FAO Irrigation and drainage paper 56. FAO, Rome. 1998; 300(9):D05109. Available: https://appgeodb.nancy.inra.fr/biljou/pdf/Allen_FAO1998.pdf.
- Al-Yahyai, R, Al-Kharusi, L 2012b. Sub-optimal irrigation affects chemical quality attributes of dates during fruit development. *African Journal of Agricultural Research*, 7(10):1498–1503
- Al-Yahyai, R., Khan, M.M. 2015. Date palm and perspective in Oman. Pages 207–240. *In Date Palm Genetic Resources and Utilization: Volume 2: Asia and Europe* (J.M. Al-Khayri, S.M. Jain, and D.V. Johnson eds). Springer, Dordrecht, Heidelberg, New York, London.
- ASAE Std., 1999. Soil and Water Terminology. S 526.1. ASAE Standards. American Society of Agricultural Engineers, St. Joseph M.I.
- Ayers, J.E., Phene, C.J., Schoneman, R.A., Meso, B., Dale, F., Penland, J. 1995. Impact of bed location on the operation of subsurface drip irrigation systems. In: Proc. 5th int Microirrigation Congress, ASAE, p.168-174.

- Bourziza, R., Hammani, A., Kuper, M., Bouaziz, A. 2014. Water Saving in Arid Regions: Comparison of Innovative Techniques for Irrigation of Young Date Palms. World Academy of Science, Engineering and Technology. International Journal of Environmental, Chemical, Ecological, Geological and Geophysical Engineering Vol: 8, No: 11, 2014.
- Dewidar, A.Z., Al-Fehaid, Y., Al-Hilal, S., Ben Saleh, M. 2016. Water saving in arid regions. A comparison of surface and subsurface drip irrigation systems. American Journal of Innovative Research and Applied Sciences. ISSN 2429-5396 I www.american-jiras.com. Available: <https://american-jiras.com/Ahmed%20ManuscriptRef.2-ajiras010716%20SAUDI2.pdf>.
- Dhehibi, B., Aw-Hassan, A., Ben Salah, M., Al Raisi, Y., Al Bousaidi, I., Al Amri, S., Al Sobahi, S. (2016). Economic comparison and evaluation of manual and liquid pollination methods of date palm trees in the Sultanate of Oman (Cv. Fardh and Khalas). ICARDA Technical Report, 11p.
- Douh, B., Boujelben, A. 2010 (a), Water saving and eggplant response to subsurface drip irrigation. Journal of Agricultural Segment, 1 (2): 1525, pp 1-12.
- El Mardi, M.O., Salama, S.B., Consolacion, E., Al-Shabibi, M.S. 1995. Effect of treated sewage water on vegetative and reproductive growth of date palm. Common Soil Science Plant Analysis, 26(11):1895–1904.
- El Mardi, M.O., Salama, S.B., Consolacion, E.C., Al-Solomi, M. 1998. Effect of treated sewage water on the concentration of certain nutrient elements in date palm leaves and fruits. Common Soil Science Plant Analysis, 29(5):763–776.
- Hanson, B., May, D. 2007. The effect of drip line placement on yield and quality of drip-irrigated processing tomatoes. Irrigation and Drainage Systems. 2007 May 1;21(2):109-18. Available: <http://link.springer.com/article/10.1007/s10795-007-9023-5#/page-1>.
- Howell, T.A. 2001. Enhancing water use efficiency in irrigated agriculture. Agronomy journal. 2001 Mar 1;93(2):281-9. Available : https://www.researchgate.net/profile/Terry_Howell4/publication/43255582_Enhancing_Water_Use_Efficiency_in_Irrigated_Agriculture/links/561bb7ef08ae6d17308b03eb.pdf.
- Payero, J. 2002. Is subsurface drip irrigation right for your operations?. Crop watch new service web page, Univ. of Nebraska, Institute of Agriculture and Natural Resources Cooperative Extension.
- Phene C.J., 1995. Sustainability and potential of subsurface drip irrigation. In: Proceedings of the Fifth International Micro Irrigation Congress, Orlando, Florida, pp. 359-367.
- Safi, B., Neyshabouri, M.R., Nazemi, A.H., Massiha, S., Mirlatifi, S.M. 2007. Water application uniformity of a subsurface drip irrigation system at various operating pressures and tape lengths. Turkish Journal of Agriculture and Forestry. 2007 Dec 12; 31(5):275-85. Available: <http://journals.tubitak.gov.tr/agriculture/issues/tar-07-31-5/tar-31-5-1-0703-15.pdf>.
- Selim, E.M., Mosa, A.A., El-Ghamry, A.M. 2009. Evaluation of humic substances fertigation through surface and subsurface drip irrigation systems on potato grown under Egyptian sandy soil conditions. Agricultural water management. 2009 Aug 31; 96(8):1218-22. Available: https://www.researchgate.net/profile/Elmetwally_Selim/publication/260002391_fertigation/links/0a85e52f0230aef08e000000.pdf.
- Singh, D.K., Rajput T.B.S. 2007. Response of lateral placement depths of subsurface drip irrigation on okra (*Abelmoschus esculentus*). International Journal of Plant Production, 1, pp 73-84.
- Thompson, T.L., Doerge T.A., Godin, R.E. 2002. Subsurface drip irrigation and fertigation of broccoli: II. Agronomic, economic, and environmental outcomes. Soil Science Society of

America Journal. 2002 Jan 1;66(1):178-85. Available:
<https://ag.arizona.edu/crops/irrigation/azdrip/pubs/SSSAJ%202002%2066%20178.pdf>.

Thompson, T.L., White, S.A., Walworth, J., Sower, G.J. 2003. Fertigation frequency for subsurface drip-irrigated broccoli. Soil science Society of America journal. 2003 May 1;67(3):910-8. Available:
<https://dl.sciencesocieties.org/publications/sssaj/abstracts/67/3/910>.

Tiwari, K.N., Mal, P.K., Singh, R.M., Chattopadhyay, A. 1998. Response of Okra (*Abelmoschus esculentus* L. Moench) to drip irrigation under mulch and non-mulch condition. Agric. Water Management. 38, pp 91-102.